IP67 : Suitable for Wet Locations
IK10 : Impact Resistant (Vandal Resistant)

SPECIALIZED LIGHTING SOLUTIONS

Mira Atlantis 1 NW : Surface Linear LED

(Nearwater)
Marine Grade Stainless Steel 316

A range of high quality stainless underwater Luminaires

This surface mounted Luminaire manufactured from Marine Grade Stainless 316 and is designed for use near water in harsh environments such as salt water spray.

The Mira Atlantis is supplied with a Stainless Steel mounting plate and remote mounted driver.

**Remote mounted driver box to be provided by Contractor.**

Not only is the housing made of the highest quality stainless steel but incorporated in the product design is a unique product feature that uses a water proof potting compound that totally seals the back of the luminaire and stops water ingress.

Installer Friendly.
The fixture is pre wired with water proof low voltage power cable making connecting to the driver a simple task.

This product is also available in **RGB** . Please contact the factory for more details.

Driver supplied but remotely installed. Remote mounted driver box and to be provided by contractor. Optional low voltage remote 24Vdc low voltage transformer.
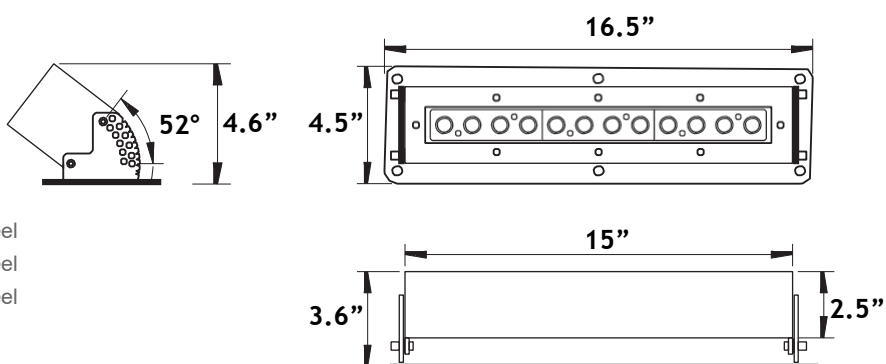
Technical Data

Fixture	Marine Grade 316 Stainless Steel
Recessing Box	Marine Grade 316 Stainless Steel
Hardware	Marine Grade 316 Stainless Steel
Lens	Tempered Glass front lens
Optics	10°, 25°, 40° beam
Driver	120-277V 50-60Hz (remote)
Low Voltage (optional)	120VAC to 36VDC low voltage transformer (remote)
Gaskets	Injection Molded Ultra High Temperature Silicone
LED (white)	3300K, 4500K, 65000K
LED (static color)	**Red**, **Green**, **Amber** or **Blue**
LED Watts	8W
Cable	16 foot Water Proof Cable
Approvals	ETL

52° 4.6”

16.5”
4.5”

15”
3.6” 2.5”

PROJECT: _____

DATE: _____

QUANTITY: _____

TYPE: _____ NOTE: _____

ETL
Intertek

Mira Atlantis 1 NW LED

16" Surface Linear

SPECIALIZED LIGHTING SOLUTIONS

16" Long
Upto 52° Tilt

16.5" 52° 4.6" 4.5"

15"

3.6" 2.5"
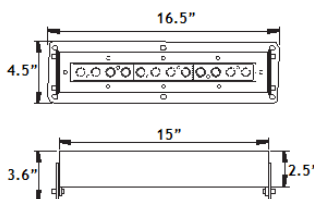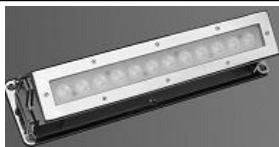
Wattage	(Specify)	Lumens
12W	429020	840

12 Watt Beam

	10°		25°		40°
23 ft	196 lx	23 ft	73 lx	23 ft	29 lx
16 ft	373 lx	16 ft	147 lx	16 ft	57 lx
10 ft	1088 lx	10 ft	380 lx	10 ft	159 lx
3 ft	9867 lx	3 ft	3560 lx	3 ft	1452 lx
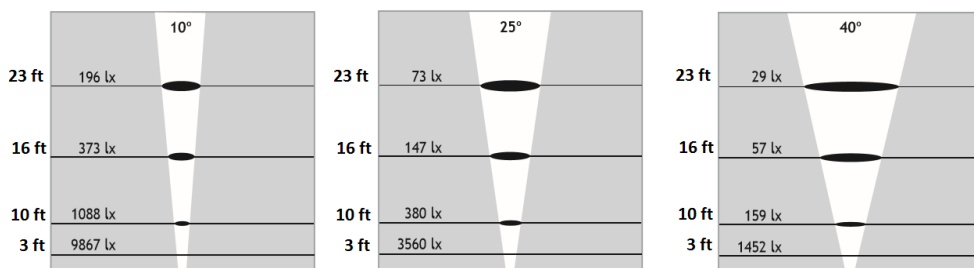
Options (Specify)

LED Color
(33K)		3300K
(45K)		4500K
(60K)		6000K
(BLU)		Blue
(RED)		Red
(AMB)		Amber
(GRN)		Green

Beam Spread
(10)	10°
(25)	25°
(40)	40°

Lens
(C)	Clear
(F)	Frosted

Volts
(UNV)	120/277V
(DC)	36VDC

Ordering Example : Mira Atlantis 1 - 429020 - 12W - DC

	Code	LED Watts	LED Color	Beam	Lens	Volts
Mira 1 -	_____	_____	_____	_____	_____	_____

PROJECT: _____ DATE: _____ QUANTITY: _____

TYPE: _____ NOTE: _____

ETL LISTED c US Intertek