



IP67 : Suitable for Wet Locations
IK10 : Impact Resistant (Vandal Resistant)

Mira Atlantis 1 NW : Surface Linear RGB

(Nearwater)

Marine Grade Stainless Steel 316

A range of high quality stainless underwater Luminaires

This surface mounted Luminaire manufactured from Marine Grade Stainless 316 and is designed for use harsh conditions near water such as salt water spray.

The Mira Atlantis is supplied with a Stainless Steel mounting plate and remote mounted DMX decoder driver. DMX decoder driver powered by low voltage transformer.

Remote mounted driver box to be provided by Contractor.


Not only is the housing made of the highest quality stainless steel but incorporated in the product design is a unique product feature that uses a water proof potting compound that totally seals the back of the luminaire and stops water ingress.

Installer Friendly.

The fixture is pre wired with water proof low voltage power cable making connecting to the driver a simple task.

This product is also available with static 3300K, 4500K & 6500K LED. Please contact the factory for more details.

RGB Controls are additional options and should be specified with the control package. Remote mounted low voltage transformer and RGB control box to be provided by contractor. See RGB Control cut sheet for driver and control specification.

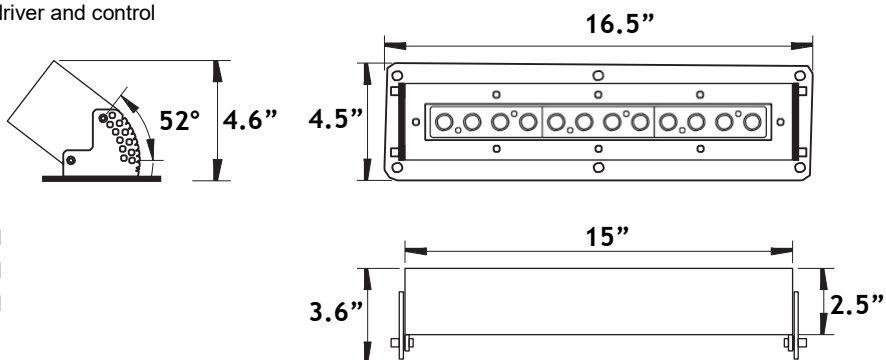

Technical Data

Fixture	Marine Grade 316 Stainless Steel
Recessing Box	Marine Grade 316 Stainless Steel
Hardware	Marine Grade 316 Stainless Steel
Lens	Tempered Glass front lens
Optics	10°, 25°, 40° beam
Power	36V DC
Gaskets	Injection Molded Ultra High Temperature Silicone
LED	RGB
LED Watts	27W
Cable	16 foot Water Proof Cable
Approvals	ETL

PROJECT: _____

DATE: _____

QUANTITY: _____

TYPE: _____

NOTE: _____

Specialized Lighting Solutions reserves the right to change specifications without prior notice, please contact factory for latest information.

Specialized Lighting Solutions, LLC
7144 NE Progress Ct
Hillsboro, OR 97124

Tel: 503-530-8908
Fax: 503-531-0711



www.slsnw.com
06/06/18



Mira Atlantis 1 NW **RGB**

16" Surface Linear

16" Long
Upto 52° Tilt

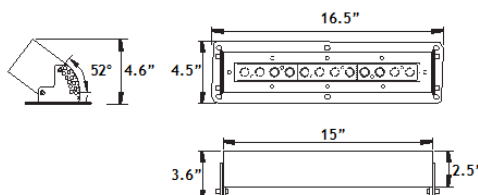

Wattage (Specify)
27W 429031
RGB

Options (Specify)

Beam Spread

(25) 25°
(40) 40°


Lens

(C) Clear
(F) Frosted

Volts

(DC) 36Vdc

Wiring Diagram

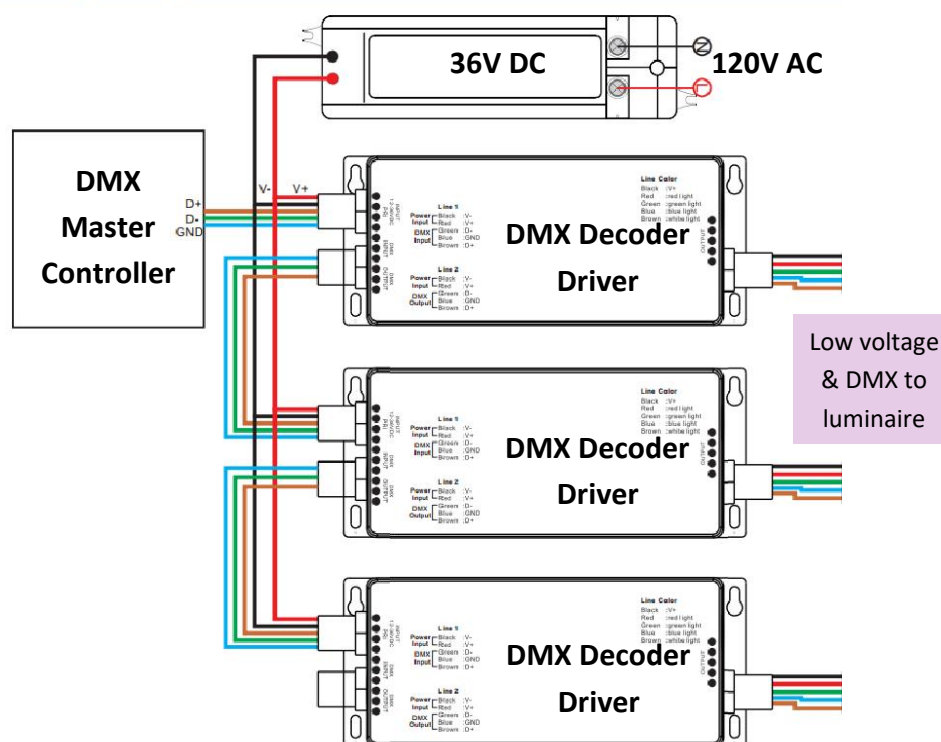

Ordering Example : Mira Atlantis 1 - 429031 - 27W - RGB - 25 – DC

Code	LED Watts	LED Color	Beam	Lens	Volts
Mira Atlantis 1 -					

PROJECT: _____

DATE: _____

QUANTITY: _____

TYPE: _____

NOTE: _____