

IP68 : Suitable for Underwater Locations IK10 : Impact Resistant (Vandal Resistant)

Mira Atlantis 1 UW: Recessed Linear LED

(Under Water) Marine Grade Stainless Steel 316

A range of high quality stainless underwater Luminaires
This recessed Luminaire manufactured from Marine Grade Stainless 316 and
is designed for use in ponds, rock pools and water features.

This luminaire is not rated for natatoriums, swimming pools or water parks. The Mira Atlantis is supplied with a Stainless Steel Recessing box and remote mounted driver.

Not only is the housing made of the highest quality stainless steel but incorporated in the product design is a unique product feature that uses a water proof potting compound that totally seals the back of the luminaire and stops water ingress.


Installer Friendly.


To assist with the installation the product is supplied with marine grade stainless steel 316 concrete recessing box.

The fixture is pre-wired with water proof cable down to the base that makes connecting to the remote driver or low voltage transformer a simple task.

This product is also available with static white & colored LEDs. Please contact the factory for more details.

Remote mounted driver box to be provided by Contractor.





Technical Data

Fixture Marine Grade 316 Stainless Steel
Recessing Box Marine Grade 316 Stainless Steel
Hardware Marine Grade 316 Stainless Steel
Lens Tempered Glass front lens

Optics 10°, 25°, 40° beam

Driver 120-277V 50-60Hz in a Remote Mount Box*

Low Voltage (optional) 120VAC to 24VDC low voltage transformer - remote mount

LED Watts 12W

Gaskets Injection Molded Ultra High Temperature Silicone

LED (white) 3300K, 4500K, 6000K

LED (static color) Red, Green, Amber or Blue


CRI > 85

Cable16 foot Water Proof Cable


Approvals ETL

PROJECT:

*Consult with factory




15"

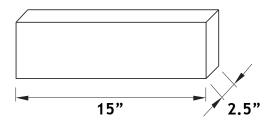

Stainless Steel Recessing Box

TYPE: _____ NOTE: ____








Mira Atlantis 1 UW: Recessed Linear LED

16" Recessed Linear in Marine Grade Stainless

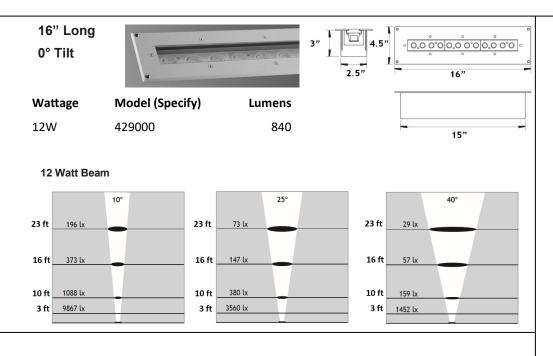

(Specify) **LED Color** __ 3300K (33K)4500K (45K) \triangle

Options

6000K (60K) (BLU) Blue (RED) Red Amber (AMB) (GRN) Green

Beam Spread (10)10° 25° (25)(40)40° Lens (C) Clear Frosted (F) Volts (UNV) 120/277V

24VDC

(DC)

Ordering Example: Mira 1 - 429000 - 12W - 33K - 10 - C - UNV

Code **LED Watts LED Color** Volts Beam Lens Mira 1 -

PROJECT:

DATE:

QUANTITY:



NOTE:

TYPE: